



HAS Minibar

(Heat absorption minibar)

Instruction Manual



Model Numbers:

HAS30-BK

HAS30-GD-BK

HAS40-BK

HAS40-GD-BK

Information in the manual is subject
to change without notice
Edition 2025/12

Please read the manual carefully before using the product.

READ THESE INSTRUCTIONS CAREFULLY BEFORE USAGE

IMPORTANT SAFETY PRECAUTIONS

Before you use your absorption minibar, please read this instruction manual carefully. Use this appliance only for its intended purpose as described in this owner's manual.

- 1 This absorption minibar must be properly installed in accordance with the installation instructions before it is used.
- 2 Never unplug the absorption minibar by pulling on the power cord. Always grasp the plug firmly and pull straight out from the wall outlet.
- 3 Repair or replace immediately the power cords that have become frayed or otherwise damaged. Do not use a cord that shows cracks or abrasion damage along its length, the plug or the end of the connector.
- 4 Remove the power plug from the socket cleaning or before making any repairs. Contact your local JVD representative to conduct any repairs.
- 5 Do not operate the minibar in the presence of explosive fumes.
- 6 The power supply must be properly grounded. Do not use an adapter plug or extension cord.
- 7 Do not use the unit near to bath or shower area or near swimming pool.
- 8 Do not store food in absorption minibar as the interior temperature may not be cool enough for such storage.
- 9 The appliance is not to be used by people (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
- 10 Children being supervised not to play with the appliance
- 11 Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

- 12 If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified people to avoid a hazard.

HOW TO OPERATE ABSORPTION MINIBAR

1. Insert power plug into wall outlet
2. To adjust the temperature, turn thermostat knob inside the minibar. (bottom shelve)
3. The inner temperature ranges from weak to strong of which strong is the coldest
4. You can turn the thermostat knob to have your desired temperature.



STRONG



WEAK

TECHNICAL SPECIFICATIONS

Product code: HAS40

Capacity: 40L

Supply voltage: 220-240V~ 50/60HZ

Rating current: 0.3A

Energy consumption: 0.8kWh/24Hrs

LED power:0.5W

Cooling system: Heat absorption


Coolant: R-717

Foaming gas: Cyclopentane

Weight 16.6 kg

Defrosting: Auto

CIRCUIT DIAGRAM

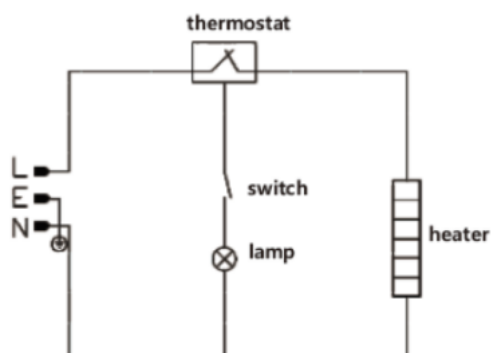

CARE AND CLEANING

Warning: To avoid electric shock always unplug the equipment before cleaning.

General guide: Do not use harsh chemicals, abrasives, ammonia, chlorine bleach, concentrated detergents, solvents or metal scouring pads to clean the minibar. These chemicals may dissolve, damage and/or discolor the appliance.

Empty the contents in the appliance

- 1 Wipe the inside and outside surface with a damp cloth. The addition of vinegar to the water is good for the prevention of mold and fungus.
- 2 Wipe all parts thoroughly after the cleaning with dry cloth.

IMPORTANT:

When the absorption minibar is not in use it must be completely dry inside to avoid mold growth

INSTALLATION

It is advisable to clean the inside of the absorption minibar with lukewarm water using a mild detergent, and then to dry it thoroughly prior to use.

The temperature in the appliance will depend on:

- The ambient temperature of where the minibar is located
- The frequency and duration of periods when the door is open
- The number of contents in the fridge

It may therefore be necessary to adjust the thermostat from time to time.

The refrigeration system of the cabinet is designed to operate with the cabinet located on a flat surface. Avoid tilting the cabinet side.

If the cabinet must be tilted on an angle for handling or moving purposes, allow it to sit in an upright position 20 to 30 minutes prior to plugging it in and starting the cooling of the storage compartment.


Grounding plug and socket should be provided in accordance with local regulations. The cable size should meet the refrigerator's requirements. They must be connected to proper electrical voltage.

VENTILATION REQUIREMENT

To ensure the proper function of the refrigerator, please observe the following recommendations.

1. To ensure circulation, the unit should be kept at least 10 cm, away from the sides of the minibar, 15cm away from the top and the rear of the minibar at least 15cm. This will allow the minibar to operate optimally.
2. Locate the unit away from direct sunlight. This will enable you to obtain the best performance and save energy.

- Under no circumstances should the top grid be covered by any object. It will hinder air circulation.

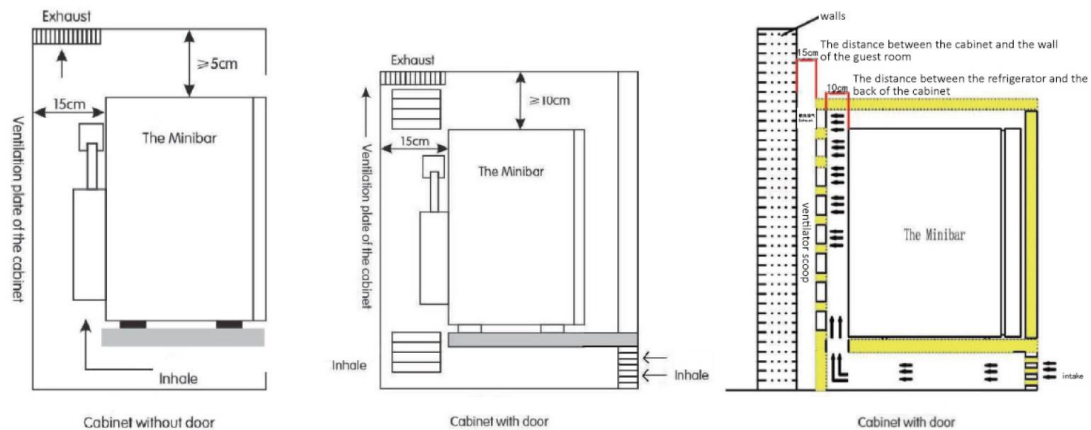

After turning on the minibar, it is important to leave it empty for at least 2 hours before you start to put in the contents.

REVERSING THE DOOR (OPTION) - How to reverse the door

- Remove the lower hinge by loosening and removing the screws with a screwdriver. Carefully lower the door and remove it.
- Remove the screws from the left top hinge position and then remove the metal part from the hinge.
- Remove the screws from the right top hinge and take off the hinge. Insert the metal part and rivet the two screws thereafter.
- Take off the lower hinge and fix it to the opposite side.
- Take the door and insert the lower hinge axle into the right bottom hole of the door.
- Fix the spare hinge to the left top position of the cabinet. Adjust the door to make it straight and in alignment with the cabinet.

Note: After reversing the door, the gasket/seal may have to be adjusted. The seal is to prevent cold air from escaping.

Warranty Statement

LIMITED WARRANTY

JVD warrants the machine to be free from defects in workmanship and materials for a period as stated in the purchase contract/ agreement. This limited warranty does not cover damage or problems that result from:

- External causes such as accident, abuse, misuse, or problems with electrical power.
- Servicing, alteration, modification not authorized by JVD or its respective service agent/ distributor.
- Usage that is not in accordance with product instructions

- Use of parts and components not supplied by JVD
- Acts of God, fire, flood, war, act of violence or any similar occurrence.

JVD's responsibility for malfunctions and defects is limited to repair and replacement as set forth in this Warranty Statement. All express and implied warranties for the product including but not limited to any implied warranties and conditions of merchantability and fitness for a particular purpose, are limited in time to the term of the limited warranty period as specified in the sales contract/agreement. No warranties, whether express or implied, will apply after the limited warranty period has expired.

WE DO NOT ACCEPT LIABILITY BEYOND THE REMEDIES PROVIDED FOR IN THIS LIMITED WARRANTY. JVD OR ITS APPOINTED DISTRIBUTORS SHALL NOT BE LIABLE FOR ANY LOSS OF OR DAMAGE TO ANY PROPERTY OR INJURY TO OR DEATH OF ANY PERSONS CAUSED BY ANY NEGLIGENT ACT OR OMISSION OR WILFUL MISCONDUCT OF THE USER. WE ALSO DO NOT ACCEPT ANY LIABILITY FOR THIRD-PARTY CLAIMS AGAINST YOU FOR DAMAGES, FOR PRODUCTS NOT BEING AVAILABLE FOR USE, OR FOR ANY LOSS OF PROPERTY.

Correct Disposal of this product



This marking indicates that this product should not be disposed of other household waste throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmentally safe recycling.